

Photo Album for Pierce Job 38205-02
Capital City Fire and Rescue, AK
Custom Arrow XT PUC Pumper

Wk 11 Production ending August 2, 2024

- The pumper is completing the alignment process this week at the 41 plant.



38205-2









EXIT

NAME	STATUS	DATE
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		











PARK (P)



BATTERY ON

6 HOURS



ULTRA LOW SULFUR DIESEL FUEL ONLY


MADE WITH PRIDE IN AMERICA

07/30/24 01:41 PM

89F

GROUND SPEED

0 MPH

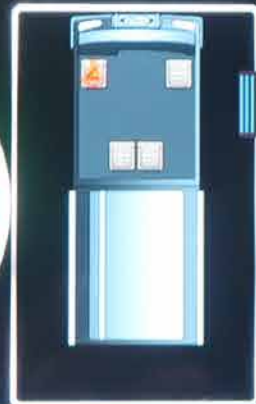

RETARDER
ON
OFF

RETARDER
AUTO-APPLY

WATER
PUMP

FOAM
SYSTEM

OFF-ROAD
TRACTION

TIRE
CHAINS

CAUTION
DISENGAGE RETARDER
WHEN VEHICLE IS ON WET
OR SLIPPERY SURFACES.

CAUTION
DO NOT ENGAGE
AUTOMATIC TIRE CHAINS
WHEN EXCEEDING 20 MPH




07/30/24 01:41 PM

90F

GROUND SPEED

0 MPH

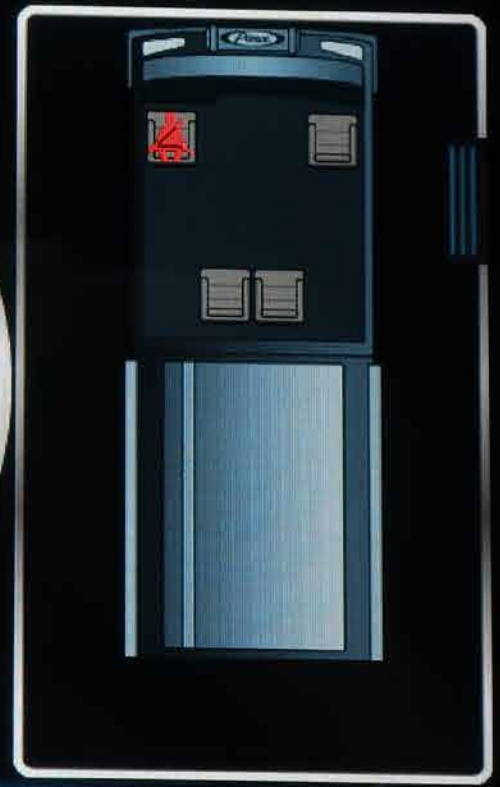



**RETARDER
ON
OFF**

**RETARDER
AUTO-APPLY**

**WATER
PUMP**

**FOAM
SYSTEM**

**OFF-ROAD
TRACTION**

**TIRE
CHAINS**

⚠ CAUTION
DISENGAGE RETARDER
WHEN VEHICLE IS ON WET
OR SLIPPERY SURFACES.
91-0298

⚠ CAUTION
DO NOT ENGAGE
AUTOMATIC TIRE CHAINS
WHEN EXCEEDING 25 MPH
91-0181

EMERGENCY MASTER
ROOF LIGHT
FRONT WARNING
SIDE WARNING
LOWER REAR WARNING
UPPER REAR WARNING
LOW INTENSITY LIGHT
AIR HORN

ROOF LIGHT
FRONT WARNING
SIDE WARNING
LOWER REAR WARNING
UPPER REAR WARNING
LOW INTENSITY LIGHT
AIR HORN



EMERGENCY
MASTER

ROOF
LIGHT

FRONT
WARNING

SIDE
WARNING

LOWER
REAR
WARNING

UPPER
REAR
WARNING

LOW
INTENSITY
LIGHT

AIR
HORN

FRONT
SCENE

DRIVER
SCENE

PASS
SCENE

REAR
SCENE

LOAD
MANAGER



POWER

HIGH
OFF
LOW



FUNCTION

LEFT
RIGHT
SPLIT
FLASH

WHELEN[®]
TRAFFIC ADVISOR™



DIRECTION INDICATOR













STAINLESS

STAINLESS

100 PSI

100 PSI

97-00-16



NO. 1 CROSSLAY
WATER - FOAM



NO. 2 CROSSLAY
WATER - FOAM



NO. 100000
SEE INSTRUCTIONS

NO. 100000
SEE INSTRUCTIONS



NO. 100000
SEE INSTRUCTIONS

NO. 100000
SEE INSTRUCTIONS

NO. 100000
SEE INSTRUCTIONS

NO. 100000
SEE INSTRUCTIONS

NO. 100000
SEE INSTRUCTIONS

NO. 100000
SEE INSTRUCTIONS

NO. 100000
SEE INSTRUCTIONS




NO. 3 DRIVER
SIDE DISCHARGE

DRIVER SIDE
AUX. INLET

Z-1850

Z-1800



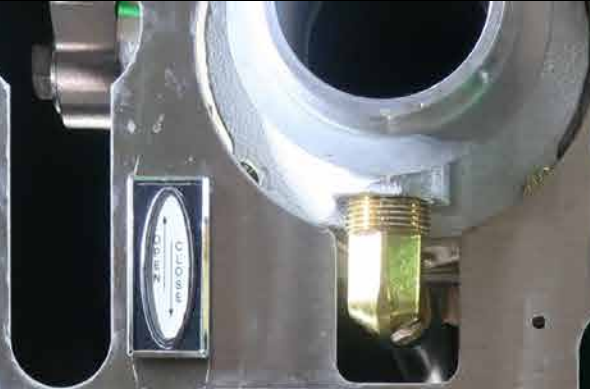

CLIMATE CONTROL

NO. 3 DRIVER SIDE DISCHARGE



CLIMATE CONTROL



NO. 3 DRIVER SIDE DISCHARGE



DRIVER SIDE ALIX INLET





NO. 1 DRIVER
SIDE DISCHARGE

NO. 1 DRIVER
SIDE DISCHARGE



ZURICO
-MOTOR-





AUX. FOAM FUNCTIONS

FOAM INLET
FOAM STRAINER
FOAM TANK DRAIN(S)

7013300



DRIVER SIDE
AUX. INLET



VALVE
HANDLE



PULL TO OPEN
NO. 1 DRIVER
SIDE DISCHARGE

PULL TO OPEN
NO. 3 DRIVER
SIDE DISCHARGE

PULL TO OPEN
PUMP DRAIN

PULL TO OPEN
DRIVER SIDE
AUX. INLET

NO. 1 DRIVER
SIDE DISCHARGE




↑ OPEN
↓ CLOSE

NO. 3 DRIVER
SIDE DISCHARGE



NO. 3 DRIVER
SIDE DISCHARGE

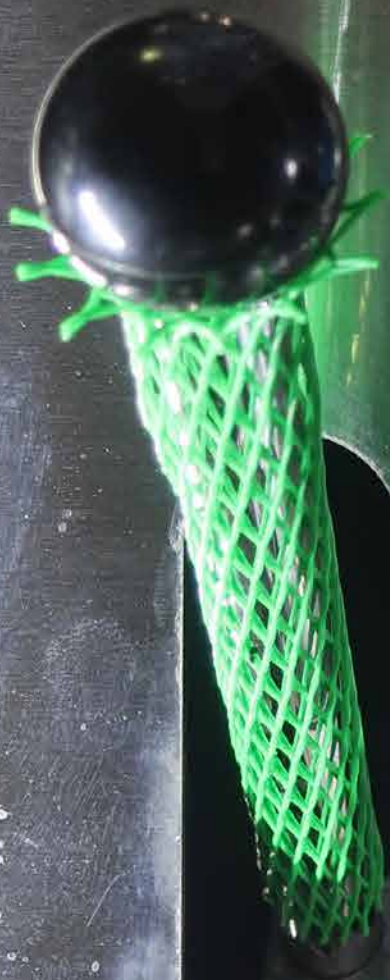

NO. 1 DRIVER
SIDE DISCHARGE

NO. 1 DRIVER
SIDE DISCHARGE





EXIT





38205-2



NO. 2 CROSSLAY
WATER - FOAM

NO. 1 CROSSLAY
WATER - FOAM



CAB LIFT
LOWER
RAISE

ACTUATOR

▲ DANGER

CAUTION: Cab Lift Operation

1. Cab Lift Operation	1. Cab Lift Operation
2. Cab Lift Operation	2. Cab Lift Operation
3. Cab Lift Operation	3. Cab Lift Operation
4. Cab Lift Operation	4. Cab Lift Operation
5. Cab Lift Operation	5. Cab Lift Operation
6. Cab Lift Operation	6. Cab Lift Operation
7. Cab Lift Operation	7. Cab Lift Operation
8. Cab Lift Operation	8. Cab Lift Operation
9. Cab Lift Operation	9. Cab Lift Operation
10. Cab Lift Operation	10. Cab Lift Operation

OVERHEAT

OVERHEAT

407 502 2000

407 502 2000

Indicator lights: white, white, green, orange

CAB LIFT

LOWER RAISE

CAUTION

CHECK OVERHEAD AREA, BUMPER
TILT, MIRRORS, AND LIGHT HOODS
BEFORE TILTING CAB

ACTIVATE

TO RAISE CAB:

1. Prepare cab to tilt.
2. Park on level surface.
3. Turn engine OFF.
4. Set parking brake.
5. Secure loose items in cab.
6. No obstructions in tilt path.
7. Fold up steps on rear wall.
8. Turn battery switch to ON.
9. Turn ignition switch to ON.
10. Turn control switch to RAISE.
11. Press ACTIVATE switch until cab fully tilts.
12. Swing safety Stay-Arm into pocket.
13. Turn control switch to LOWER.
14. Press ACTIVATE switch until cab is leveling on Stay-Arm.

TO LOWER CAB:

1. Prepare cab to lower.
2. Check that no persons or obstructions are in tilt path.
3. Fold up steps on rear wall.
4. Parking brake must be set.
5. Turn battery switch to ON.
6. Turn ignition switch to ON.
7. Turn control switch to RAISE.
8. Press ACTIVATE switch until cab is off safety Stay-Arm.
9. Slow and secure Stay-Arm.
10. Turn control switch to LOWER.
11. Press ACTIVATE switch until cab fully lowers and for 5 seconds after cab comes to rest.
12. Make sure cab is latched down before operating vehicle.

⚠ DANGER

CAB STAY ARM MUST BE IN THE SUPPORT POSITION BEFORE MOVING UNDER OR WORKING ON THE CAB IN THE TILT POSITION.

NEVER WORK ON THE CAB WITHOUT STAY ARM IN THE SUPPORT POSITION.
FAILURE TO FOLLOW PROPER PROCEDURES CAN RESULT IN INJURY OR DEATH.

2005436

OVERRIDE

NO. 2 PASSENGER
SIDE DISCHARGE



LARGE DIA. PASS
SIDE DISCHARGE

OVERRIDE

OVERRIDE



PASSENGER SIDE
AUX. INLET



OVERRIDE



OVERRIDE



LAFFRE DIA. PASS
SIDE DISCHARGE





WATER STRAINER



VERRIDE

NO. 2 PASSENGER
SIDE DISCHARGE



CAB LIFT
LOWER

ACTIVATE

▲ DANGER

CAB LIFT, AND WHEELS, DO NOT MOVE UNTIL THE CAB IS FULLY LOWERED. ALWAYS WEAR YOUR SEATBELT AND HOLD ON TO THE CAB LIFT. NEVER REAR END THE CAB. ALWAYS USE THE CORRECT PROCEDURES. ALWAYS USE THE CORRECT PROCEDURES TO LOWER THE CAB. ALWAYS USE THE CORRECT PROCEDURES TO LOWER THE CAB.

CAB LIFT

LOWER

RAISE



CAUTION
OVERHEAD AREA, BUMPER
MIRRORS, AND SIGHT POOLS
BEFORE TILTING CAB

ACTIVATE



CAB LIFT OPERATING INSTRUCTIONS

TO RAISE CAB:

1. Prepare cab to tilt:
Park on level surface.
Turn engine OFF.
Set parking brake.
Secure loose items in cab.
No obstructions in tilt path.
Fold up steps on rear wall.
2. Turn battery switch to ON.
3. Turn ignition switch to ON.
4. Turn control switch to RAISE.
5. Press ACTIVATE switch until cab fully tilts.
6. Swing safety Stay-Arm into pocket.
7. Turn control switch to LOWER.
8. Press ACTIVATE switch until cab is resting on Stay-Arm.

TO LOWER CAB:

1. Prepare cab to lower:
Check that no persons or obstructions are in tilt path.
Fold up steps on rear wall.
2. Parking brake must be set.
Turn battery switch to ON.
Turn ignition switch to ON.
Turn control switch to RAISE.
Press ACTIVATE switch until cab is off safety Stay-Arm.
Slow and secure Stay-Arm.
Turn control switch to LOWER.
Press ACTIVATE switch until cab fully lowers and for 5 seconds after cab comes to rest.
10. Make sure cab is latched down before operating vehicle.

⚠ DANGER
CAB STAY ARM MUST BE IN THE SUPPORT POSITION BEFORE MOVING UNDER OR WORKING ON THE CAB IN THE TILT POSITION.
NEVER WORK ON THE CAB WITHOUT STAY ARM IN THE SUPPORT POSITION.
FAILURE TO FOLLOW PROPER PROCEDURES CAN RESULT IN INJURY OR DEATH.

Manual Override: See Operation Manual

2005090 2005436

OVERRIDE

NO. 2 PASSENGER SIDE DISCHARGE

LARGE DIA. PASS.
SIDE DISCHARGE

OVERRIDE



OVERRIDE



PULL TO OPEN
PASSENGER SIDE
AUX. INLET

PULL TO OPEN
PUMP DRAIN

PULL TO OPEN
LARGE DIA. PASS.
SIDE DISCHARGE

PULL TO OPEN
NO. 2 PASSENGER
SIDE DISCHARGE



WATER STRAINER











Pierce



SRS

SAFETY WARNING LABEL

	NO SMOKING
	NO OPEN FLAMES
	NO ALCOHOL
	NO CELL PHONE
	NO EATING OR DRINKING
	NO LEANING BACK
	NO SLEEPING
	NO TALKING
	NO READING
	NO WRITING
	NO PHONE
	NO RADIO
	NO TV
	NO VIDEO
	NO MUSIC
	NO GAMES
	NO SOCIAL MEDIA
	NO INTERNET
	NO EMAIL
	NO TEXT
	NO SOCIAL MEDIA
	NO INTERNET
	NO EMAIL
	NO TEXT







RADIO
PTT

A circular silver button with a black center, mounted on a light gray panel. Below the button is a black rectangular label with the text "RADIO PTT" in white.



ELECTRONIC
SIREN

A circular silver button with a black center, mounted on a light gray panel. Below the button is a black rectangular label with a white oval containing the text "ELECTRONIC SIREN" in black.



AIR HORN

A circular silver button with a black center, mounted on a light gray panel. Below the button is a black rectangular label with a white oval containing the text "AIR HORN" in black.





UltraSound



SQUELCH

INTERCOM



VOLUME







HUGHES FIRE EQUIPMENT